

39WATTS

White LED SMD 2'x2'
Acoustical Ceiling Light
Color: 5000 K
3900 LUMENS
UL DRIVER
White Lens PC cover
120-277V 50/60HZ indoor
use Long life 35,000
hours.







39W



MADE IN CHINA


ITEM# IP-LEDPAN/2X2/39W/5K/MV





NEW SLIM DESIGN



FLAT PANEL LED FIXTURE 2' X 2'

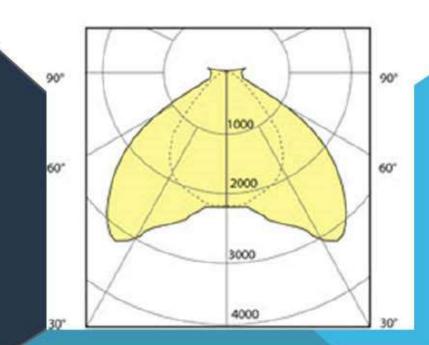

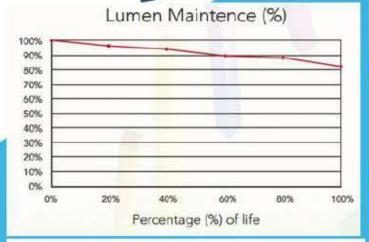

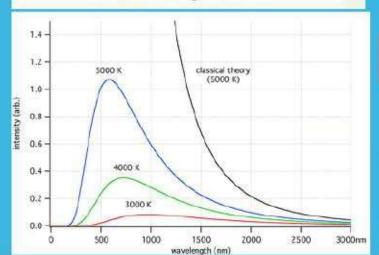



39W



MADE IN CHINA


ITEM# IP-LEDPAN/2X2/39W/5K/MV



NEW SLIM DESIGN

DIMMABLE

FLAT PANEL LED 2' X 2'

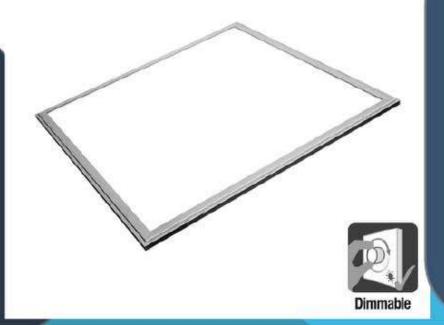

39WATTS

White LED SMD 2'x2' **Acoustical Ceiling Light** Color: 5000 K **3900 LUMENS UL DRIVER** White Lens PC cover DIMMABLE 0-10% 120-277V 50/60HZ indoor use Long life 35,000 hours.







39W



ITEM# IP-LEDPAN/DIM/2X2/39W/5K/MV





NEW SLIM DESIGN




DIMMABLE

FLAT PANEL LED 2' X 2'

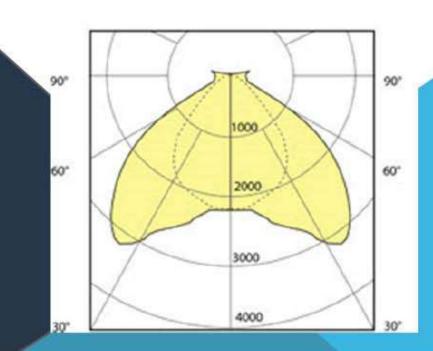

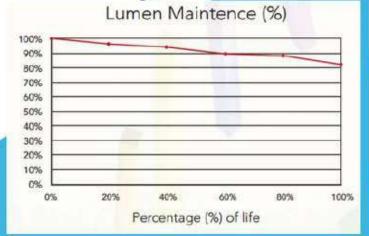

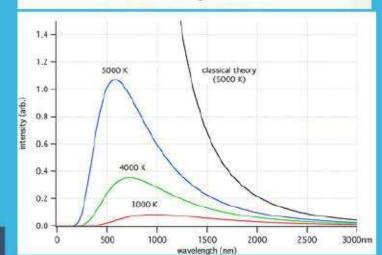



39W



MADE IN CHINA

ITEM# IP-LEDPAN/DIM/2X2/39W/5K/MV







FLAT PANEL LED FIXTURE
2' X 4'



60WATTS

White LED SMD 2'x4'
Acoustical Ceiling Light
Color: 5000 K
5900 LUMENS
UL DRIVER
White Lens PC cover
120-277V 50/60HZ indoor
use Long life 35,000
hours.



60W



ITEM# IP-LEDPAN/2X4/60W/5K/MV





NEW SLIM DESIGN




FLAT PANEL LED FIXTURE 2' X 4'

OBTU POST LIGHT Light Distribution Curve

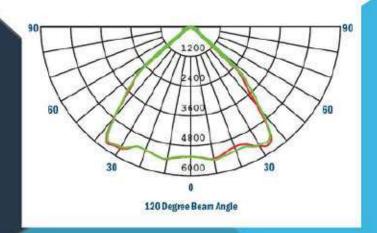

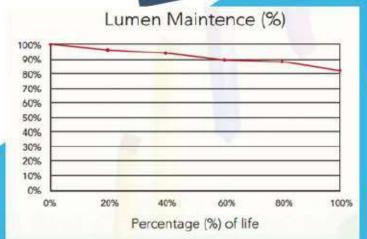

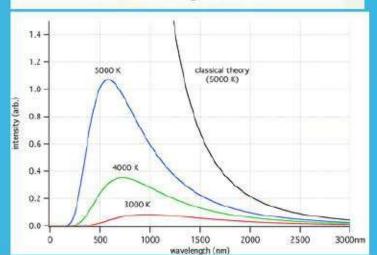



60W



MADE IN CHINA

ITEM# IP-LEDPAN/2X4/60W/5K/MV





100W-LED

COBRA STREET LIGHT

LED	Fixture Size	Arm	Initial	Equilvalant lamp
Wattage	(LxWxH)	Diameter	Lumens	
2x50W	27'' X 10.750"X 3 1/8	2 3/8"	10500lm	200W HPS





LED


100W



LED STREET LIGHT WITH CAST ALLUMINUM HOUSING AND HEAT DISIPITATION SYSTEM, 100W/ 85-305VOLTS 50/60HZ 6500K. BLACK COLOR. HIGH POWER LED CHIP

ITEM# IP-100W/COB/SL/6.5K/MV

LED STREET LIGHT 150 WATTS



Working Temperature: -30°to 50°C

Die-cast aluminum housing, extrusion aluminum heat radiator. Photocell socekt pre-installed.

Each Module 50w, not effect each other.

IP65 Complete

Available for Vertical or Horizontal Installation, arm

Diameter 60mm













Multi ang adjustable

150W

Light Wattage

Initial Lumens (LM)

Equivalent Lamp

L Size (mm)

23"

17720

250W HPS

LED STREET LIGHT WITH CAST ALLUMINUM HOUSING AND HEAT DISIPITATION SYSTEM. 150W, 85-305VOLTS, 50/60HZ ,6500K SILVER COLOR. HIGH POWER LED CHIP

150W



ITEM # IP-150W/SL/MOULD-6.5K/MV



NEW SLIM DESIGN



ITEM# IP-30W/FL/6.5K/120V

30WATTS

White LED SMD Flood Light.

Beam Angle: 120°.

6500K. 120V 50/60HZ

Long life 35,000 hours.

WATERPROOF, IP65







30W





NEW SLIM DESIGN



ITEM# IP-50W/FL/6.5K/120V

50WATTS

White LED SMD Flood Light.

Beam Angle: 120°.

6500K 120V 50/60HZ

Long life 35,000 hours.

WATERPROOF, IP65







50W





NEW SLIM DESIGN



ITEM# IP-100W/FL/6.5K/MV

100WATTS

White LED SMD Flood Light.

Beam Angle: 120°.

6500K 120-277V 50/60HZ

Long life 35,000 hours.

WATERPROOF, IP65







100W





NEW SLIM DESIGN



ITEM# IP-150W/FL/6.5K/MV

150WATTS

White LED SMD Flood Light.

Beam Angle: 120°.

6500K 120-277V 50/60HZ

Long life 35,000 hours.

WATERPROOF, IP65







150W











36 WATTS

LED SMD 4' Strip
Light Fixture
Outdoor or Indoor
120V 50/60HZ; 5000K
White PC Lens cover
and Housing. With
Mounting Base.
Long life 35,000 hours.





ITEM# IP-4FT/36W/LEDBAR/ENC/5K/120V









18 WATTS

LED SMD 2' Strip
Light Fixture
Outdoor or Indoor
120V;50/60HZ 5000K
White PC Lens cover
and Housing with
Mounting Base.
Long life 35,000 hours.




20W



ITEM# IP-2FT/18W/LEDBAR/ENC/5K/120V



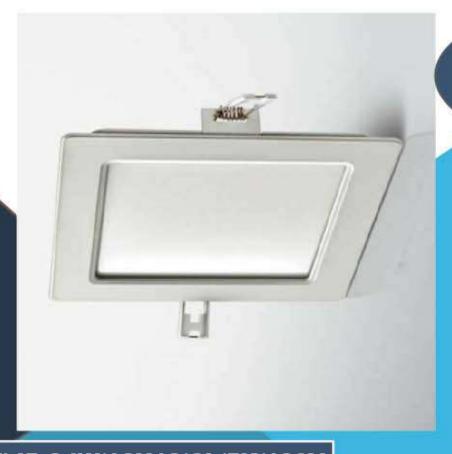

LED 24W 12" X 12"

LED SQUARE
LIGHT FIXTURE
FOR INDOOR USE.
120V 50/60HZ 5000K
LONG LIFE 35,000 HRS.
EASY INSTALLATION ON
GYPSUM BOARD.





LED

24W



ITEM# IP-24W/12X12/CL/5K/120V







LED 24W 12" X 12"

SURFACE MOUNT

LED SQUARE
LIGHT FIXTURE
FOR INDOOR USE.
120V 50/60HZ 5000K
LONG LIFE 35,000 HRS.
EASY INSTALLATION.










MADE IN CHINA

ITEM# IP-24W/12X12/SM/5K/120V







LED EMERGENCY LIGHT

- Injection-molded ABS housing
- Wall or ceiling mounting
- Super bright SMD 20PCS 2x2W
- Sealed lead acid Battery 6V 2000mAh
- Test button and charge indicator light
- Backup time: ≥ 3 hours
- Conversion time: <0.2second
- IP Class: IP20
- Insulation: II, Range: 80m²
- Operating Temperature: 0°C~40°C
- · Overcharge & Over-discharge protection









ITEM# IP-EMER/LT-120V



NEW SLIM DESIGN





20WATTS

20W White LED SMD Flood Light. Beam Angle: 120°. LED Color: 6500 K. Emitting covered with waterproof material IP65. Long life> 35,000 hours.

LED SOLAR









TN





60WATTS

LED SOLAR













LED SOLAR

Integrated Solar Street Ligh	it	Model:1	ES-760	
Salar naust	Max Power	18V 45W		
Solar panel	Life Time	25 years		
Dattani	Туре	Lithium battery 12V 25Ah		
Battery	Life Time	5 years		
3	Lumen(LM)	6000-66001m		
Ladlama av anu COM	Led chip brand	Philips		
Led lamp 3 x 20w - 60W	Life Time	50000 hours		
	Color Temperature(CCT)	6000-7200K		
Lamps material of main	Aluminium Alloy			
Charge time	10 hours(by sun)			
Discharge time	12 hours, 3- 5 day rainy days			
Certificate	CE, ROHS, IP65,ISO 9001			
Warranty period	2 years	Mounting height	8-9M	
	Product Size	834*355*156MM		
	Product Weight	11.5KG		
Packing& Weight	Packing Box	neutral		
racking& weight	Carton Size	880*415*230MM		